CCS Technical Documentation
NEM-2 Series Transceivers

Parts List

Issue 1 07/03
©Nokia Corporation

[This page left intentionally blank]

 ©Nokia Corporation.

Table of Contents

Page No

Exploded View of Nokia NEM-2 4
Mechanical and Assembly Parts List 5
Parts List NEM-2 6

 ©Nokia Corporation.

Exploded View of Nokia NEM-2

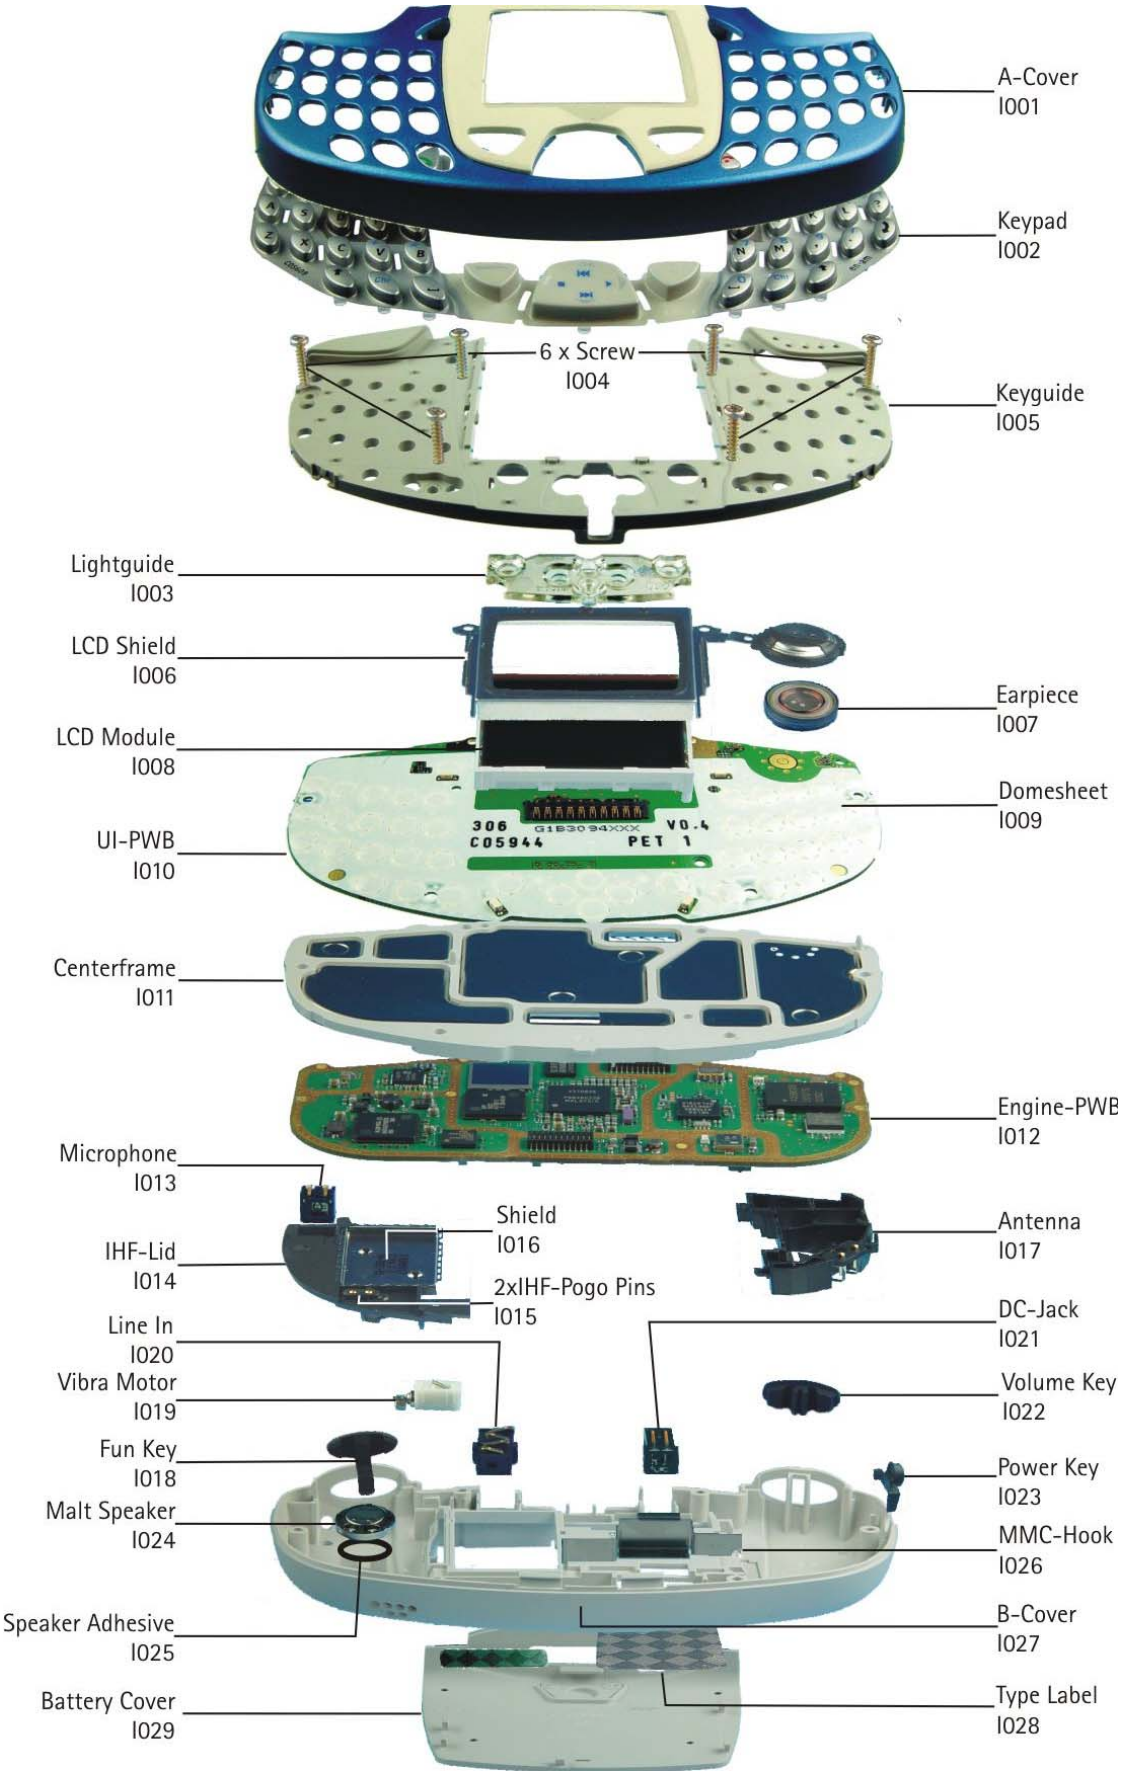

 ©Nokia Corporation.

Mechanical and Assembly Parts List

Item	NMP-Code	Name	Quantity
1	9459032	A - Cover - Assy (light blue)	1
1	9459030	A - Cover - Assy (orange)	
2	9790777	Silicone - keypad (engl.)	1
2	9790813	Silicone - keypad (can-french)	
2	9790814	Silicone - keypad (spanish.)	
3	9460541	Lightguide	1
4	6150071	Screw - M1.8x11, ZN YEL Torx Plus	6
5	9460588	Keyguide - Assy	1
6	9511052	LCD - Shield	1
7	5140067	Earpiece	1
8	4850265	LCD - Module, 130x130 COF CSTN 4KCO	1
9	not available	Domesheet - Assy	1
10	201970	UI - PWB - Assy	1
11	9517220	Centerframe - Assy	1
12	not available	Engine PWB	1
13	5140277	Beetle EMC MIC	1
14	262848	IHF lid - Assy	1
14	9560164	IHF-pin	2
14	9511050	Audio - Met.- Shield	1
17	066F006	Antenna - Assy	1
18	9790751	FUN Key - Assy	1
19	6800053	Vibra + Rubber	1
20	5400121	Line - in - 2.5mm	1
21	5400243	DC - jack	1
22	9794097	Vol - Key - Assy	1
23	9790744	Power key	1
24	5140253	Malt - Speaker	1
25	9480890	Speaker adhesive	1
26	9511058	MMC - Hook	1
27	262849	B-Cover	1
28	9370986	Type Label, 23x18,5 6,2x25,0	1
29	9459026	Battery - Cover (light blue)	1
29	9459025	Battery - Cover (orange)	

©Nokia Corporation.

Parts List NEM-2

ITEM	CODE	SIDE	X	Y	VALUE	PART NAME	VALUE	VALUE
B200	4510219	Top	M	4	CRYSTAL_CX_4V	CRYSTAL 32.768KHZ+-30PPM 9PF	32.768kHz	~
B850	4510407	Top	B	3	CRYSTAL_NX5032GA	SMCRYST 12MHZ +-50PPM 8PF	12MHz	~
C100	2320544	Bottom	R	3	0402C	Chipcap 5% NP0	22p	50V
C101	2315213	Bottom	S	5	0405_2_P0.65	CHIP ARRAY NP0 2X22P K 25V 0405	2x22p	25V
C102	2320536	Bottom	J	9	0402C	Chipcap 5% NP0	10p	50V
C103	2320744	Bottom	L	9	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C104	2320560	Bottom	M	9	0402C	Chipcap 5% NP0	100p	50V
C105	2320481	Bottom	O	9	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C106	2320778	Bottom	O	9	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C107	2320481	Bottom	P	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C108	2320544	Bottom	J	8	0402C	Chipcap 5% NP0	22p	50V
C109	2320544	Bottom	J	8	0402C	Chipcap 5% NP0	22p	50V
C110	2315213	Bottom	K	9	0405_2_P0.65	CHIP ARRAY NP0 2X22P K 25V 0405	2x22p	25V
C111	2320544	Bottom	K	9	0402C	Chipcap 5% NP0	22p	50V
C112	2320744	Bottom	J	9	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C113	2320744	Bottom	J	9	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C115	2320536	Bottom	J	9	0402C	Chipcap 5% NP0	10p	50V
C116	2320548	Bottom	G	8	0402C	Chipcap 5% NP0	33p	50V
C117	2320548	Bottom	G	8	0402C	Chipcap 5% NP0	33p	50V
C120	2320558	Bottom	J	9	0402C	Chipcap 5% NP0	82p	50V
C121	2320778	Bottom	G	8	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C122	2315213	Bottom	B	6	0405_2_P0.65	CHIP ARRAY NP0 2X22P K 25V 0405	2x22p	25V
C123	2320544	Bottom	B	7	0402C	Chipcap 5% NP0	22p	50V
C124	2320536	Bottom	J	9	0402C	Chipcap 5% NP0	10p	50V
C150	2310037	Top	B	7	0805C	CHIPCAP X5R 10U M 6V3 0805	10U	6V3
C151	2320764	Top	C	7	0402C	Chipcap X7R 10% 25V 0402	6n8	25V
C152	2315209	Top	K	4	0405_2_P0.65_AVX	CHIP ARRAY X5R 2X33N M 10V 0405	2x33n	10V
C153	2320764	Top	C	7	0402C	Chipcap X7R 10% 25V 0402	6n8	25V
C154	2320744	Top	J	4	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C155	2310037	Top	K	3	0805C	CHIPCAP X5R 10U M 6V3 0805	10U	6V3
C156	2320764	Top	K	3	0402C	Chipcap X7R 10% 25V 0402	6n8	25V
C157	2315209	Top	K	4	0405_2_P0.65_AVX	CHIP ARRAY X5R 2X33N M 10V 0405	2x33n	10V
C158	2320764	Top	K	3	0402C	Chipcap X7R 10% 25V 0402	6n8	25V
C161	2320805	Top	L	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C200	2320805	Top	M	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C201	2320481	Top	M	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C202	2320778	Top	M	6	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C203	2320481	Top	J	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C204	2320481	Top	M	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C205	2320481	Top	L	3	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C206	2320481	Top	L	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C207	2320481	Top	J	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C208	2320481	Top	J	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C209	2320536	Top	M	5	0402C	Chipcap 5% NP0	10p	50V
C210	2320536	Top	M	4	0402C	Chipcap 5% NP0	10p	50V
C211	2320481	Top	M	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C212	2320481	Top	M	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C213	2320481	Top	M	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C214	2320481	Top	L	3	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C215	2320481	Top	L	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C218	2320805	Top	J	6	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C219	2320481	Top	M	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C220	2320778	Top	K	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C221	2320481	Top	M	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C222	2320481	Top	L	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C223	2320481	Top	M	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C224	2320481	Top	L	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C225	2320481	Top	M	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C226	2320481	Top	L	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C227	2320481	Top	L	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C228	2320481	Top	K	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C229	2320481	Top	K	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C230	2320481	Top	L	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C231	2320481	Top	L	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V

 ©Nokia Corporation.

ITEM	CODE	SIDE	X	Y	VALUE	PART NAME	VALUE	VALUE
C232	2320481	Top	L	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C233	2320481	Top	M	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C234	2320481	Top	L	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C235	2320481	Top	L	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C236	2320805	Top	J	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C237	2320805	Top	J	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C238	2320805	Top	M	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C239	2320805	Top	K	3	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C240	2320778	Top	L	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C241	2320744	Top	J	4	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C242	2320744	Top	J	4	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C243	2320481	Top	L	3	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C260	2320481	Top	M	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C261	2320481	Top	M	5	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C262	2320481	Top	M	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C263	2320481	Top	M	5	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C264	2320481	Top	M	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C265	2320481	Top	J	4	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C300	2320481	Top	L	1	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C301	2320548	Top	M	1	0402C	Chipcap 5% NP0	33p	50V
C302	2320125	Top	M	2	0603C	CHIPCAP X5R 1U K 16V 0603	1u0	16V
C306	2320544	Bottom	U	6	0402C	Chipcap 5% NP0	22p	50V
C357	2320778	Top	F	8	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C358	2320785	Top	F	8	0402C	chipcap x7r 47n k 10v 0402	47n	10V
C359	2320805	Top	E	8	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C361	2320744	Top	D	7	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C362	2320778	Top	E	8	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C363	2315261	Top	E	7	0405_2_P0.65	CHIP ARRAY X5R 2X47N K 10V 0405	2x47n	10V
C364	2321007	Top	D	7	0402C	CERCAP X7R 22N K 16V 0402	22n	16V
C365	2315209	Top	E	7	0405_2_P0.65_AVX	CHIP ARRAY X5R 2X33N M 10V 0405	2x33n	10V
C366	2320785	Top	E	7	0402C	chipcap x7r 47n k 10v 0402	47n	10V
C367	2320560	Top	F	8	0402C	Chipcap 5% NP0	100p	50V
C370	2320760	Top	F	8	0402C	Chipcap X7R 10% 25V 0402	4n7	25V
C371	2320778	Top	F	7	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C372	2320481	Top	F	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C373	2321007	Top	D	7	0402C	CERCAP X7R 22N K 16V 0402	22n	16V
C374	2320744	Top	D	8	0402C	Chipcap X7R 10% 50V 0402	1n0	50V
C375	2320752	Top	D	8	0402C	Chipcap X7R 10% 50V 0402	2n2	50V
C378	2320546	Top	F	7	0402C	Chipcap 5% NP0	27p	50V
C379	2320552	Top	F	8	0402C	Chipcap 5% NP0	47p	50V
C390	2320805	Bottom	K	1	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C391	2320522	Top	H	1	0402C	Chipcap +-0.25pF NP0	2p7	50V
C392	2320522	Bottom	H	8	0402C	Chipcap +-0.25pF NP0	2p7	50V
C400	2320778	Top	J	6	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C401	2320805	Top	J	5	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C402	2320778	Top	I	7	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C403	2320778	Top	H	4	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C404	2320778	Top	H	4	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C405	2320778	Top	I	7	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C420	2320560	Top	J	7	0402C	Chipcap 5% NP0	100p	50V
C421	2320560	Top	J	7	0402C	Chipcap 5% NP0	100p	50V
C422	2320560	Top	K	7	0402C	Chipcap 5% NP0	100p	50V
C450	2320778	Top	H	7	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C451	2320805	Top	H	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C452	2320805	Top	K	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C454	2320779	Top	H	9	0603_BLM	CHIPCAP X7R 100N K 16V 0603	100n	16V
C500	2320805	Top	O	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C501	2320778	Top	Q	8	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C502	2320554	Top	Q	5	0402C	Chipcap 5% NP0	56p	50V
C503	2320536	Top	O	5	0402C	Chipcap 5% NP0	10p	50V
C504	2320805	Top	O	5	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C505	2320546	Top	O	6	0402C	Chipcap 5% NP0	27p	50V
C511	2315017	Top	P	4	0612_W3A4_CAF13	CHIP ARRAY NP0 4X470P J 16V 0612	4x470p	16V
C513	2320584	Top	R	2	0402C	Chipcap 5% X7R	1n0	50V

©Nokia Corporation.

ITEM	CODE	SIDE	X	Y	VALUE	PART NAME	VALUE	VALUE
C514	2320536	Top	R	2	0402C	Chipcap 5% NP0	10p	50V
C516	2320633	Top	R	1	0402C	CHIPCAP NP0 220P J 25V 0402	220p	25V
C517	2320564	Top	R	2	0402C	Chipcap 5% NP0	150p	50V
C518	2318009	Top	R	2	0805C_AVX	CHIPCAP NP0 3N3 J 16V 0805	3n3	16V
C519	2320805	Top	O	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C520	2322023	Top	Q	5	0603C	CHIPCAP NP0 2N2 J 16V 0603	2n2	16V
C523	2320560	Top	O	6	0402C	Chipcap 5% NP0	100p	50V
C524	2322023	Top	Q	6	0603C	CHIPCAP NP0 2N2 J 16V 0603	2n2	16V
C525	2322023	Top	Q	6	0603C	CHIPCAP NP0 2N2 J 16V 0603	2n2	16V
C526	2320491	Top	Q	8	0603C	CHIPCAP X7R 220N K 10V 0603	220n	10V
C528	2320907	Top	P	6	0402C_AVX	CHIPCAP NP0 HQ 0P7 B 16V 0402	0p7	16V
C530	2320554	Top	P	6	0402C	Chipcap 5% NP0	56p	50V
C532	2320558	Top	P	4	0402C	Chipcap 5% NP0	82p	50V
C533	2320584	Top	P	7	0402C	Chipcap 5% X7R	1n0	50V
C534	2320552	Top	O	6	0402C	Chipcap 5% NP0	47p	50V
C537	2320552	Top	O	6	0402C	Chipcap 5% NP0	47p	50V
C538	2320554	Top	Q	4	0402C	Chipcap 5% NP0	56p	50V
C539	2320546	Top	U	5	0402C	Chipcap 5% NP0	27p	50V
C540	2320540	Top	Q	5	0402C	Chipcap 5% NP0	15p	50V
C543	2320584	Top	N	4	0402C	Chipcap 5% X7R	1n0	50V
C551	2320633	Top	Q	6	0402C	CHIPCAP NP0 220P J 25V 0402	220p	25V
C604	2310037	Top	F	4	0805C	CHIPCAP X5R 10U M 6V3 0805	10U	6V3
C605	2320783	Top	E	6	0402C	CHIPCAP X7R 33N K 10V 0402	33n	10V
C606	2320778	Top	F	5	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C607	2320778	Top	F	5	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C611	2320805	Top	C	6	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C613	2310037	Top	F	6	0805C	CHIPCAP X5R 10U M 6V3 0805	10U	6V3
C615	2310037	Top	C	5	0805C	CHIPCAP X5R 10U M 6V3 0805	10U	6V3
C619	2310037	Top	D	6	0805C	CHIPCAP X5R 10U M 6V3 0805	10U	6V3
C700	2320778	Top	S	5	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C701	2312243	Top	S	5	0805C	CHIPCAP X5R 4U7 K 6V3 0805	4u7	6V3
C702	2320546	Top	R	5	0402C	Chipcap 5% NP0	27p	50V
C703	2610041	Bottom	Q	3	TANT_TPSY	CHIPTCAP 220U M 10V 7.3X4.3X2.0	220u_10V	10V
C704	2320538	Top	R	5	0402C	Chipcap 5% NP0	12p	50V
C708	2320584	Top	T	5	0402C	Chipcap 5% X7R	1n0	50V
C709	2320538	Top	S	5	0402C	Chipcap 5% NP0	12p	50V
C710	2320554	Top	T	7	0402C	Chipcap 5% NP0	56p	50V
C712	2310045	Top	U	7	0402C_GRM36	CHIPCAP X5R 68N K 10V 0402	68n	10V
C713	2320538	Top	S	7	0402C	Chipcap 5% NP0	12p	50V
C714	2320584	Top	U	7	0402C	Chipcap 5% X7R	1n0	50V
C715	2320546	Top	T	8	0402C	Chipcap 5% NP0	27p	50V
C717	2320560	Top	S	7	0402C	Chipcap 5% NP0	100p	50V
C719	2320546	Top	T	8	0402C	Chipcap 5% NP0	27p	50V
C720	2320540	Top	R	8	0402C	Chipcap 5% NP0	15p	50V
C722	2320554	Top	T	5	0402C	Chipcap 5% NP0	56p	50V
C723	2320554	Top	U	5	0402C	Chipcap 5% NP0	56p	50V
C724	2320540	Top	R	8	0402C	Chipcap 5% NP0	15p	50V
C725	2320522	Top	R	7	0402C	Chipcap +-0.25pF NP0	2p7	50V
C726	2320584	Top	R	7	0402C	Chipcap 5% X7R	1n0	50V
C728	2310045	Top	S	8	0402C_GRM36	CHIPCAP X5R 68N K 10V 0402	68n	10V
C731	2320584	Top	R	6	0402C	Chipcap 5% X7R	1n0	50V
C732	2320584	Top	U	7	0402C	Chipcap 5% X7R	1n0	50V
C800	2320560	Top	S	4	0402C	Chipcap 5% NP0	100p	50V
C801	2320540	Top	S	3	0402C	Chipcap 5% NP0	15p	50V
C802	2320805	Top	S	3	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C803	2320516	Top	S	3	0402C	Chipcap +-0.25pF NP0	1p5	50V
C805	2320560	Top	S	2	0402C	Chipcap 5% NP0	100p	50V
C806	2320560	Top	S	4	0402C	Chipcap 5% NP0	100p	50V
C807	2320526	Top	S	2	0402C	Chipcap +-0.25pF NP0	3p9	50V
C808	2320552	Top	U	4	0402C	Chipcap 5% NP0	47p	50V
C810	2320538	Top	T	3	0402C	Chipcap 5% NP0	12p	50V
C811	2320546	Top	T	4	0402C	Chipcap 5% NP0	27p	50V
C812	2320554	Top	U	4	0402C	Chipcap 5% NP0	56p	50V
C850	2320540	Top	B	2	0402C	Chipcap 5% NP0	15p	50V

 ©Nokia Corporation.

ITEM	CODE	SIDE	X	Y	VALUE	PART NAME	VALUE	VALUE
C851	2320540	Top	B	3	0402C	Chipcap 5% NP0	15p	50V
C853	2320778	Top	F	4	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C854	2320778	Top	F	3	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C855	2310037	Top	B	4	0805C	CHIPCAP X5R 10U M 6V3 0805	10U	6V3
C856	2320805	Top	C	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C857	2320778	Top	D	1	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C858	2320805	Top	F	3	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C859	2320805	Top	E	1	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C860	2320805	Top	D	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C861	2320805	Top	D	1	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C862	2320805	Top	F	2	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C863	2320805	Top	C	3	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C865	2310037	Top	F	3	0805C	CHIPCAP X5R 10U M 6V3 0805	10U	6V3
C866	2320805	Top	D	1	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C867	2320805	Top	E	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C868	2320805	Top	F	2	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C869	2320805	Top	C	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C870	2320805	Top	F	2	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C871	2320805	Top	D	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C872	2320805	Top	E	1	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C900	2320805	Top	H	2	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C901	2320805	Top	H	1	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C920	2320481	Bottom	Q	8	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C921	2320778	Bottom	Q	8	0402C	Chipcap X7R 10% 16V 0402	10n	16V
C922	2320481	Bottom	P	7	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C923	2320805	Bottom	P	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C924	2320805	Bottom	Q	8	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C940	2320544	Bottom	I	8	0402C	Chipcap 5% NP0	22p	50V
C941	2320544	Bottom	H	8	0402C	Chipcap 5% NP0	22p	50V
C942	2320544	Bottom	H	8	0402C	Chipcap 5% NP0	22p	50V
C943	2320544	Bottom	G	8	0402C	Chipcap 5% NP0	22p	50V
C944	2320481	Bottom	F	5	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C945	2320137	Bottom	F	4	0603C	CHIPCAP X5R 470N K 10V 0603	470n	10V
C946	2320552	Bottom	F	4	0402C	Chipcap 5% NP0	47p	50V
C947	2320481	Bottom	E	5	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C948	2320137	Bottom	E	4	0603C	CHIPCAP X5R 470N K 10V 0603	470n	10V
C949	2320552	Bottom	E	4	0402C	Chipcap 5% NP0	47p	50V
C950	2320783	Bottom	F	4	0402C	CHIPCAP X7R 33N K 10V 0402	33n	10V
C951	2610101	Bottom	D	5	TANT_XTE	CHIPTCAP 22U M 6.3V 3.5X2.8X1.9	22u_6.3V	6.3V
C952	2320805	Bottom	D	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C953	2610101	Bottom	E	5	TANT_XTE	CHIPTCAP 22U M 6.3V 3.5X2.8X1.9	22u_6.3V	6.3V
C954	2320805	Bottom	D	5	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C957	2610101	Bottom	C	5	TANT_XTE	CHIPTCAP 22U M 6.3V 3.5X2.8X1.9	22u_6.3V	6.3V
C958	2320805	Bottom	D	4	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C959	2610041	Bottom	E	7	TANT_TPSY	CHIPTCAP 220U M 10V 7.3X4.3X2.0	220u_10V	10V
C960	2610041	Bottom	E	6	TANT_TPSY	CHIPTCAP 220U M 10V 7.3X4.3X2.0	220u_10V	10V
C961	2320805	Bottom	E	3	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C962	2610101	Bottom	C	4	TANT_XTE	CHIPTCAP 22U M 6.3V 3.5X2.8X1.9	22u_6.3V	6.3V
C963	2320805	Bottom	E	3	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
C964	2320264	Bottom	D	6	0603C	Chipcap NP0 2% 50V 0603	330p	50V
C965	2315213	Bottom	D	1	0405_2_P0.65	CHIP ARRAY NP0 2X22P K 25V 0405	2x22p	25V
C966	2320544	Bottom	D	1	0402C	Chipcap 5% NP0	22p	50V
C968	2320787	Bottom	C	6	0402C	CHIPCAP X7R 15N K 16V 0402	15n	16V
C969	2320491	Bottom	D	6	0603C	CHIPCAP X7R 220N K 10V 0603	220n	10V

©Nokia Corporation.

ITEM	CODE	SIDE	X	Y	VALUE	PART NAME	VALUE	VALUE
C970	2320783	Bottom	C	6	0402C	CHIPCAP X7R 33N K 10V 0402	33n	10V
C972	2320783	Bottom	C	6	0402C	CHIPCAP X7R 33N K 10V 0402	33n	10V
C973	2320481	Bottom	C	6	0603C	CHIPCAP X5R 1U K 6V3 0603	1u0	6.3V
C975	2610101	Bottom	D	7	TANT_XTE	CHIPTCAP 22U M 6.3V 3.5X2.8X1.9	22u_6.3V	6.3V
C976	2320805	Bottom	C	7	0402C	CHIPCAP X5R 100N K 10V 0402	100n	10V
D200	4370825	Top	K	6	uBGA168	UEMK 4.4 W-DOG ENA TO21 TFBGA168	~	~
D400	4375017	Top	H	5	uBGA144_CC	UPP8M V3.01B2 F751542A UBGA144	~	~
D450	4341501	Top	H	8	COMBO_128MB_SI	COMBO128M NOR+8M SRAM TBGA48	128M/8M	~
D851	4370991	Top	D	3	PBGA_N179	DSP TMS320DA250GHH-144 UBGA179	~	~
D900	4340987	Top	G	2	uBGA48_6.47X6.49	FLASH 1MX16 100NS 2.7V B3 UBGA48	1Mx16	~
F100	5119019	Bottom	M	9	0603_FUSE	SM FUSE F 1.5A 32V 0603	1.5A	~
G300	4700131	Bottom	Q	9	XH414_II02N	CELL CAPACITOR 0.01MAH 3V3	3V3	~
G500	4350391	Top	Q	2	VCO_FDK_IT_4	VCO 3290-3980MHZ 2.7V 20MA	3290-3980MHz	~
G501	451U034	Top	P	8	NKG3138C	VCTCXO 26MHZ +-3PPM 2.7v 1.3MA GSM	26MHz	~
L100	3203743	Bottom	M	9	0805_BLM21	FERR.BEAD 0R03 42R/100MHZ 3A 0805	42R/100MHz	~
L101	3203725	Bottom	L	9	FERRITE_0402	FERRITE BEAD 0R6 600R/100M 0402	600R/100MHz	~
L102	3203725	Bottom	L	9	FERRITE_0402	FERRITE BEAD 0R6 600R/100M 0402	600R/100MHz	~
L103	3645223	Bottom	I	9	COIL_0603CS	CHIP COIL 33N J Q40/250MHZ 0603	33nH	~
L104	3203801	Bottom	K	8	0405_2_MATSU	CHIP BEAD ARRAY 2X1000R 0405	2x1000R/100MHz	~
L105	3203725	Bottom	J	9	FERRITE_0402	FERRITE BEAD 0R6 600R/100M 0402	600R/100MHz	~
L106	3203725	Bottom	J	9	FERRITE_0402	FERRITE BEAD 0R6 600R/100M 0402	600R/100MHz	~
L108	3646081	Top	F	8	0402L_XL	CHIP COIL 68N J Q17/300M 0402	68nH	~
L260	3203741	Top	M	6	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L261	3203741	Top	M	5	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L262	3203741	Top	M	7	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L263	3203741	Top	M	5	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L264	3203741	Top	M	6	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L265	3203741	Top	J	4	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L300	3640119	Top	N	1	CHOKE_984FB	CHOKE 22U M 1R4 0.33A 3.3X3.3X1.5	22uH	~
L356	3645349	Top	F	9	COIL_0603CS	CHIP COIL 33NH G Q40/250MHZ 0603	33nH	~
L357	3645349	Top	E	9	COIL_0603CS	CHIP COIL 33NH G Q40/250MHZ 0603	33nH	~
L358	3645233	Top	F	8	COIL_JELF243Q	CHIP COIL 120N G Q32/150MHZ 0603	120nH	~
L501	3646053	Top	P	6	0402L	CHIP COIL 4N7 +-0N3 Q28/800M 0402	4n7H	~
L503	3646053	Top	P	6	0402L	CHIP COIL 4N7 +-0N3 Q28/800M 0402	4n7H	~
L510	3203725	Top	Q	6	FERRITE_0402	FERRITE BEAD 0R6 600R/100M 0402	600R/100MHz	~
L600	3640149	Top	D	5	CHOKE_ELL4LM100MN	CHOKE 15U M 0.5A 4X4X1.8	15uH	~
L601	3203741	Top	C	5	0603_BLM	FERRITE BEAD 0R5 600R/100MHZ 0603	600R/100MHz	~
L700	3203743	Top	R	5	0805_BLM21	FERR.BEAD 0R03 42R/100MHZ 3A 0805	42R/100MHz	~
L703	3646053	Top	R	7	0402L	CHIP COIL 4N7 +-0N3 Q28/800M 0402	4n7H	~
L800	3646047	Top	S	3	0402L	CHIP COIL 3N3 +-0N3 Q28/800M 0402	3n3H	~
L805	3646047	Top	T	2	0402L	CHIP COIL 3N3 +-0N3 Q28/800M 0402	3n3H	~
L806	3646065	Top	P	4	0402L	CHIP COIL 12N J Q31/800M 0402	12nH	~
L808	3646065	Top	P	4	0402L	CHIP COIL 12N J Q31/800M 0402	12nH	~
L940	3203743	Bottom	C	3	0805_BLM21	FERR.BEAD 0R03 42R/100MHZ 3A 0805	42R/100MHz	~
L942	3203743	Bottom	C	7	0805_BLM21	FERR.BEAD 0R03 42R/100MHZ 3A 0805	42R/100MHz	~
N100	4341063	Bottom	O	9	SOT23_5_H1.2	REG 2.8V/150MA LP3985 SOT23-5	~	2.8V
N101	4210371	Bottom	J	8	SOT_363	TRX2 UMF28 50V 0.1A SOT363	~	~
N102	4210371	Top	B	5	SOT_363	TRX2 UMF28 50V 0.1A SOT363	~	~
N301	4341309	Top	M	1	SOT23L_8	DC/DC CONV 350MA TK11851 SSOP8	~	~
N356	4341427	Top	E	8	HVQFN40	FM RECEIVER TEA5767HN LQFP40	~	~
N500	4370949	Top	P	5	uBGA_108_P0.5	HELGO73A TFBGA108	~	~
N602	4341541	Top	E	5	MSOP_8_H1.1	VREG 3.3V 300MA LP3981-3.3 MSOP8	~	3.3V
N603	4341255	Top	C	5	SO8_MINI	VREG PWM/LDO NCP1500 MSOP8	~	~
N700	435B067	Top	T	6	PW_AMP_RF9219E1_H1.8	PW AMP MODULE GSM850/1800/1900	~	~
N920	4341543	Bottom	Q	8	SOT23_5_H1.2	VREG 3.3V/150MA LP3985-3.3 SOT23	~	3.3V
N940	4341513	Bottom	E	4	PBGA_N80_MIRROR	AUDIO CODEC W/AF AMP TLV320AIC23B	~	~
N941	4341221	Bottom	C	6	USMD9_AAB	AF AMP 0.4W/2.6V LM4890 USMD9	~	~
R100	1430804	Bottom	N	8	0402R	Resistor 5% 63mW	100k	~
R101	1430804	Bottom	I	8	0402R	Resistor 5% 63mW	100k	~
R102	1620103	Bottom	J	8	0404_R_SR	Chipres Array 0W06 J 0404	2x22R	~
R103	1620025	Top	B	5	0404_R_SR	RES NETWORK 0W06 2X100K J 0404	2x100k	~
R104	1620107	Top	B	5	MNR02_SR	RES NETWORK 0W06 2X22K J 0404	2x22k	~
R105	1430804	Bottom	I	8	0402R	Resistor 5% 63mW	100k	~
R106	4120081	Bottom	K	9	uBGA_10_1.7X2.05	ASIP EMIF02-USB02 USB/ESD BGA8	~	~

 ©Nokia Corporation.

ITEM	CODE	SIDE	X	Y	VALUE	PART NUMBER	VALUE	VALUE
R107	1430790	Bottom	I	8	0402R	Resistor 5% 63mW	27k	~
R111	1620107	Bottom	I	8	MNR02_SR	RES NETWORK 0W06 2X22K J 0404	2x22k	~
R112	1825031	Bottom	K	9	0405_2	VARISTOR ARRAY 2XVWM16V VC50 0405	2XVWM16V	16V
R113	1620107	Bottom	J	8	MNR02_SR	RES NETWORK 0W06 2X22K J 0404	2x22k	~
R114	1620107	Bottom	J	8	MNR02_SR	RES NETWORK 0W06 2X22K J 0404	2x22k	~
R121	1825031	Bottom	B	6	0405_2	VARISTOR ARRAY 2XVWM16V VC50 0405	2XVWM16V	16V
R150	1620103	Top	L	4	0404_R_SR	Chipres Array 0W06 J 0404	2x22R	~
R151	1620031	Top	B	7	0404_R_SR	RES NETWORK 0W06 2X1K0 J 0404	2x1k0	~
R152	1620105	Top	B	7	MNR02	RES NETWORK 0W06 2X2k2 J 0404	2x2k2	~
R153	1430778	Top	K	4	0402R	Resistor 5% 63mW	10k	~
R154	1620031	Top	K	3	0404_R_SR	RES NETWORK 0W06 2X1K0 J 0404	2x1k0	~
R155	1620105	Top	K	3	MNR02	RES NETWORK 0W06 2X2k2 J 0404	2x2k2	~
R156	1430734	Top	C	7	0402R	Resistor 5% 63mW	220R	~
R157	1620105	Top	K	4	MNR02	RES NETWORK 0W06 2X2k2 J 0404	2x2k2	~
R158	1430734	Top	J	3	0402R	Resistor 5% 63mW	220R	~
R159	1620105	Top	K	4	MNR02	RES NETWORK 0W06 2X2k2 J 0404	2x2k2	~
R200	1419003	Top	M	6	1210_R	CHIPRES 0W5 0R22 J 1210	0R22	~
R202	1620043	Top	J	3	EXB28V	RES NETWORK 0W03 4X100K J 0804	4x100k	~
R206	1430770	Top	L	3	0402R	Resistor 5% 63mW	4k7	~
R207	1430770	Top	K	3	0402R	Resistor 5% 63mW	4k7	~
R304	1430716	Top	L	2	0402R	Resistor 5% 63mW	39R	~
R307	1430754	Top	L	1	0402R	Resistor 5% 63mW	1k0	~
R308	1430754	Top	L	2	0402R	Resistor 5% 63mW	1k0	~
R311	1430726	Bottom	U	6	0402R	Resistor 5% 63mW	100R	~
R312	1825031	Bottom	S	8	0405_2	VARISTOR ARRAY 2XVWM16V VC50 0405	2XVWM16V	16V
R313	1825033	Bottom	U	6	0402_VAR	CHIP VARISTOR VW14V VC46V 0402	14V/46V	~
R314	1825033	Bottom	D	8	0402_VAR	CHIP VARISTOR VW14V VC46V 0402	14V/46V	~
R315	1430804	Top	J	4	0402R	Resistor 5% 63mW	100k	~
R316	1430804	Top	I	7	0402R	Resistor 5% 63mW	100k	~
R357	1430792	Top	D	8	0402R	Resistor 5% 63mW	33k	~
R359	1430778	Top	F	8	0402R	Resistor 5% 63mW	10k	~
R360	1430804	Top	F	8	0402R	Resistor 5% 63mW	100k	~
R361	1620019	Top	D	8	0404_R_SR	RES NETWORK 0W06 2X10K J 0404	2x10k	~
R367	1430786	Top	F	7	0402R	Resistor 5% 63mW	18k	~
R369	1430792	Top	D	7	0402R	Resistor 5% 63mW	33k	~
R388	4120071	Bottom	K	1	uBGA8	ASIP EMIF03-SIM01 SIM FILTER BGA8	~	~
R420	1430726	Top	J	6	0402R	Resistor 5% 63mW	100R	~
R421	1430778	Top	J	7	0402R	Resistor 5% 63mW	10k	~
R422	1430790	Top	J	7	0402R	Resistor 5% 63mW	27k	~
R423	1430778	Top	J	7	0402R	Resistor 5% 63mW	10k	~
R450	1430770	Top	I	9	0402R	Resistor 5% 63mW	4k7	~
R503	1430693	Top	Q	2	0402R	Chipres 0W06 5R6 J 0402	5R6	~
R504	1430772	Top	R	1	0402R	Resistor 5% 63mW	5k6	~
R506	1430772	Top	R	1	0402R	Resistor 5% 63mW	5k6	~
R507	1430770	Top	O	4	0402R	Resistor 5% 63mW	4k7	~
R508	1430772	Top	O	4	0402R	Resistor 5% 63mW	5k6	~
R511	1430726	Top	Q	6	0402R	Resistor 5% 63mW	100R	~
R512	1430770	Top	Q	6	0402R	Resistor 5% 63mW	4k7	~
R513	1430726	Top	Q	6	0402R	Resistor 5% 63mW	100R	~
R514	1430788	Top	Q	5	0402R	Resistor 5% 63mW	22k	~
R516	1430770	Top	Q	5	0402R	Resistor 5% 63mW	4k7	~
R517	1430774	Top	Q	9	0402R	Resistor 5% 63mW	6k8	~
R526	1430784	Top	P	4	0402R	Resistor 5% 63mW	15k	~
R528	1620033	Top	O	6	0404_R	RES NETWORK 0W06 2X5K6 J 0404	2x5k6	~
R529	1620033	Top	N	6	0404_R	RES NETWORK 0W06 2X5K6 J 0404	2x5k6	~
R530	1430756	Top	Q	6	0402R	Resistor 5% 63mW	1k2	~
R601	1620019	Top	C	4	0404_R_SR	RES NETWORK 0W06 2X10K J 0404	2x10k	~
R700	1430700	Top	R	6	0402R	Resistor 5% 63mW	10R	~
R704	1430700	Top	T	5	0402R	Resistor 5% 63mW	10R	~
R705	1430714	Top	T	7	0402R	Resistor 5% 63mW	33R	~
R708	1430681	Top	U	8	0402R	CHIPRES 0W06 4R3 J 0402	4R3	~
R715	1430714	Top	S	7	0402R	Resistor 5% 63mW	33R	~
R716	1430756	Top	R	6	0402R	Resistor 5% 63mW	1k2	~
R718	1430734	Top	U	5	0402R	Resistor 5% 63mW	220R	~
R720	1430691	Top	S	7	0402R	CHIPRES 0W06 2R2 J 0402	2R2	~
R721	1430691	Top	T	7	0402R	CHIPRES 0W06 2R2 J 0402	2R2	~

©Nokia Corporation.

ITEM	CODE	SIDE	X	Y	VALUE	PART NUMBER	VALUE	VALUE
R722	1430700	Top	U	7	0402R	Resistor 5% 63mW	10R	~
R800	1430700	Top	S	3	0402R	Resistor 5% 63mW	10R	~
R802	1430738	Top	S	3	0402R	Resistor 5% 63mW	270R	~
R803	1430754	Top	S	2	0402R	Resistor 5% 63mW	1k0	~
R851	1620019	Top	F	2	0404_R_SR	RES NETWORK 0W06 2X10K J 0404	2x10k	~
R853	1620025	Top	F	3	0404_R_SR	RES NETWORK 0W06 2X100K J 0404	2x100k	~
R864	1620017	Top	E	5	0404_R_SR	RES NETWORK 0W06 2X100R J 0404	2x100R	~
R868	1620025	Top	B	3	0404_R_SR	RES NETWORK 0W06 2X100K J 0404	2x100k	~
R870	1620019	Bottom	F	3	0404_R_SR	RES NETWORK 0W06 2X10K J 0404	2x10k	~
R923	1430804	Bottom	Q	8	0402R	Resistor 5% 63mW	100k	~
R924	1430754	Bottom	Q	8	0402R	Resistor 5% 63mW	1k0	~
R927	4120101	Bottom	M	8	uBGA11_1.77X2	ASIP MMC-INTERFACE ESD FILT BGA11	~	~
R940	1430754	Bottom	I	8	0402R	Resistor 5% 63mW	1k0	~
R941	1620047	Bottom	F	5	EXB28V_SR	RES NETWORK 0W03 4X4K7 J 0804	4x4k7	~
R942	1620047	Bottom	E	5	EXB28V_SR	RES NETWORK 0W03 4X4K7 J 0804	4x4k7	~
R945	1620025	Bottom	H	8	0404_R_SR	RES NETWORK 0W06 2X100K J 0404	2x100k	~
R952	1430710	Bottom	D	5	0402R	Resistor 5% 63mW	22R	~
R955	1412279	Bottom	C	4	0805R	CHIPRES 0W1 2R2 J 0805	2R2	~
R958	1430788	Bottom	D	6	0402R	Resistor 5% 63mW	22k	~
R959	1825031	Bottom	E	1	0405_2	VARISTOR ARRAY 2XVWM16V VC50 0405	2XVWM16V	16V
R960	1430710	Bottom	D	6	0402R	Resistor 5% 63mW	22R	~
R961	1430792	Bottom	D	6	0402R	Resistor 5% 63mW	33k	~
R962	1430804	Bottom	D	6	0402R	Resistor 5% 63mW	100k	~
R963	1620107	Bottom	C	6	MNR02_SR	RES NETWORK 0W06 2X22K J 0404	2x22k	~
R971	1430788	Bottom	E	4	0402R	Resistor 5% 63mW	22k	~
S300	5209001	Bottom	V	7	BUTTON_EVQP	SM SW TACT SPST 12V 50MA SIDE KEY	~	~
S301	5209001	Bottom	T	8	BUTTON_EVQP	SM SW TACT SPST 12V 50MA SIDE KEY	~	~
S302	5209001	Bottom	R	9	BUTTON_EVQP	SM SW TACT SPST 12V 50MA SIDE KEY	~	~
S303	5209001	Bottom	C	9	BUTTON_EVQP	SM SW TACT SPST 12V 50MA SIDE KEY	~	~
T500	4550187	Top	P	2	TRANS_LDB213	TRANSF BALUN 3600MHZ+-400MHZ	~	~
T700	4550223	Top	R	7	TRANS_LDB15	TRANSF BALUN 1800+-100mhz 2x1.25	~	~
V100	4113721	Bottom	M	8	CASE_457	TVS DI 1PMT16AT3 16V 175W PWRMITE	~	~
V301	4110441	Top	M	2	CASE425_04	SCH DI STPS0520Z 20V 0.5A SOD123	~	~
V356	4110965	Top	E	8	SOD_523	CAP.DI BB202 CT=2.5 FM 0R8 SOD523	~	~
V357	4110965	Top	E	8	SOD_523	CAP.DI BB202 CT=2.5 FM 0R8 SOD523	~	~
V600	4110441	Top	C	5	CASE425_04	SCH DI STPS0520Z 20V 0.5A SOD123	~	~
V802	4210261	Top	S	2	SOT_363	TR BGA428 LNA1.8GHZ 19.5DB SOT363	~	~
X100	5409141	Bottom	Q	5	CONN_T_29744	SM BATTERY CONN 4POL SPR. 12V 2A	~	~
X101	5460061	Bottom	K	#	SYSCON_MQ20	SM SYSTEM CONNECTOR 14POL	~	~
X300	5469217	Top	K	2	CONN_R0923_2	SM CONN 2X11 SPR 50V 0.5A PCB/PCB	~	~
X301	5469217	Top	N	9	CONN_R0923_2	SM CONN 2X11 SPR 50V 0.5A PCB/PCB	~	~
X386	5400085	Bottom	H	4	SIM_READER_H	SIM CARD READER 2X3POL P2.54 SM	~	~
X920	5409295	Bottom	M	7	CONN_CT4_003	MMC-CONNECTOR	~	~
Z700	4511403	Top	T	8	FILTER_FAR_F5	SAW FILT 836+-12.5MHZ 2.7DB 2.5X2	824-849MHz	~
Z800	3640427	Top	S	3	TRANS_LDB20	BALUN TRANS 1.9GHZ+/-100MHZ 1206	~	~
Z801	4511339	Top	T	3	DCS4D_H1.0	SAW FILT 1960+-30MHZ/2.7DB 2X2.5	1960MHz	~
Z802	4550259	Top	T	4	ANT_SW_SHS_I	ANT.SW. 2SAW 824-894/1710-1990MHZ	~	~

 ©Nokia Corporation.